
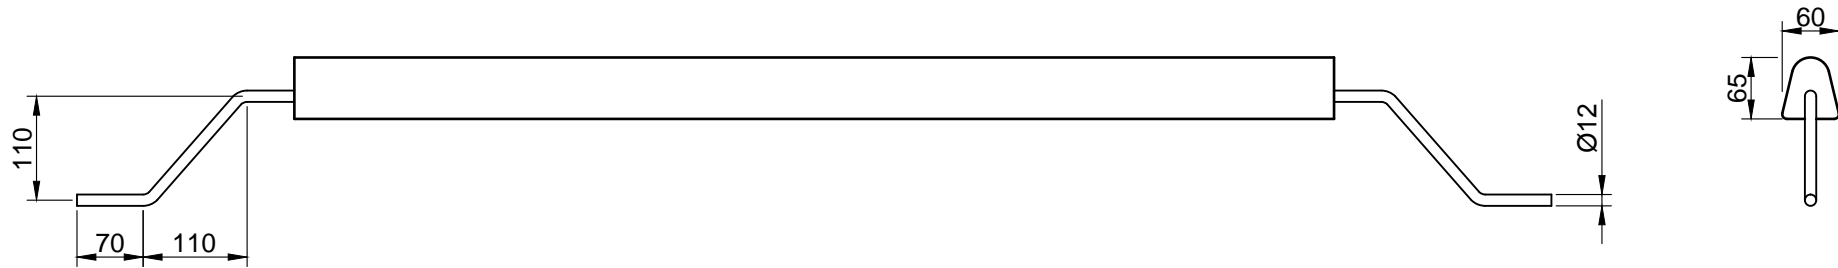


A

B

C

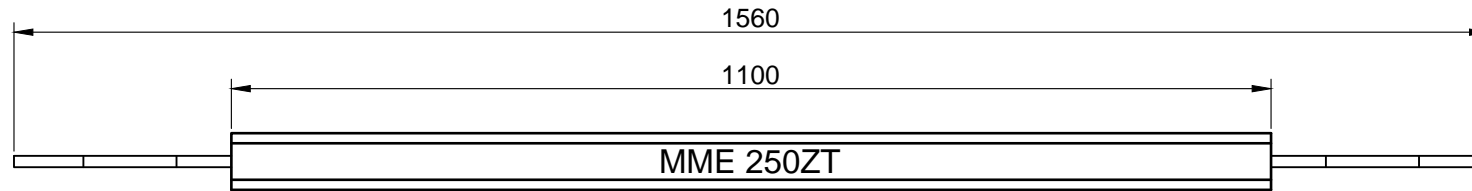

### Zinc alloy specifications acc. US Mil. Spec-A-18001K

Components	Impurities	Percentage (%)
Cadmium		0.025 - 0.07
Aluminium		0.10 - 0.5
Zinc		Remainder
	Copper	0.005 max
	Iron	0.005 max
	Lead	0.006 max
	Others total	0.10 max

Electrochemical capacity: 780 AHr/Kg nominal  
Solution potential: -1050mV vs. Ag/AgCl reference cell nominal (in seawater)

Other specifications are available on request.

Note: All dimensions and weights are nominal. Dimensions in mm  
All data is subject to change without prior notice  
Tank anodes available with Z-cranked (shown) or straight insert  
Other insert arrangements on request  
Anode can also be provided backside coated

Nett Weight: 25.0 Kg  
Gross Weight: 26.4 Kg

Date:			<b>Cathodic Protection Division</b> Rietdekkerstraat 16 P.O. Box 4222 2980 GE Ridderkerk Netherlands Tel: +31 (0)180 48 28 28 E-mail: sales@mme.nl www.mme-group.com		Projection: 
			Order number:		<b>Zinc Alloy Tank Anode</b> <b>MME 250ZT</b>
Description:	Drawn: PdG	Date: 31-07-13	Project:		Sheet 1/1
	Checked: JdR	Date: 31-07-13	Dwg: MME 250ZT		
Rev.	Approved: PM	Date: 31-07-13	Copyright MME. No part of this drawing may be copied, disclosed, or made public, in any form, without prior written consent of Materiaal Metingen Europe.		

A

B

C